

CEILING MOUNTS

Spring Rubber® ceiling hanger

Load from 8 to 100 kg.


This is a new range of anti-vibration mounts, combining the high deflection of the spring with the dampening properties of the rubber. The metallic structure is very robust and it is supplied with an anticorrosive zinc-plated coat.



To select correct mounting, following data are needed:


- Load per mounting (kg).
- Disturbing frequency (Hz).

Select correct load line in diagram 1 and refer to diagram 2 to obtain the Natural frequency. With this natural frequency prolong this line to the diagram 3 and obtain the % of isolation at the given frequency of excitation.

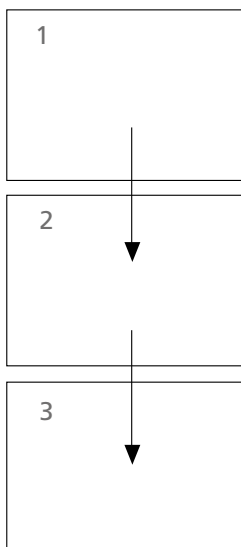


Dynamic behaviour


Static load deflection graph

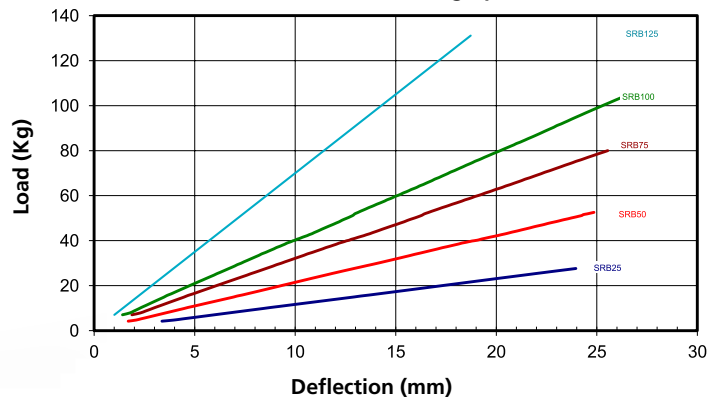

Natural frequency (Hz)

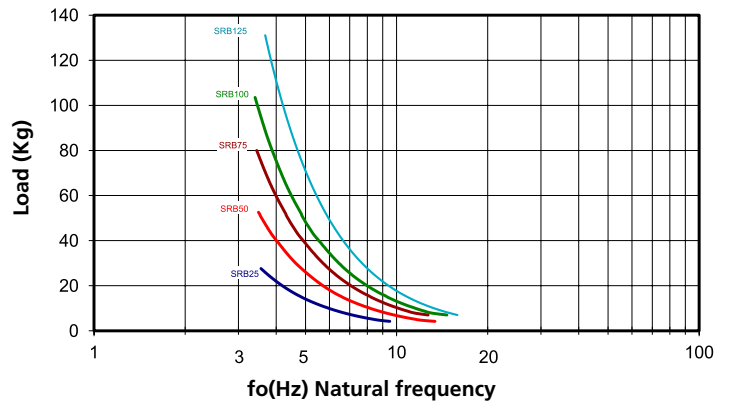

% of isolation and attenuation in dB

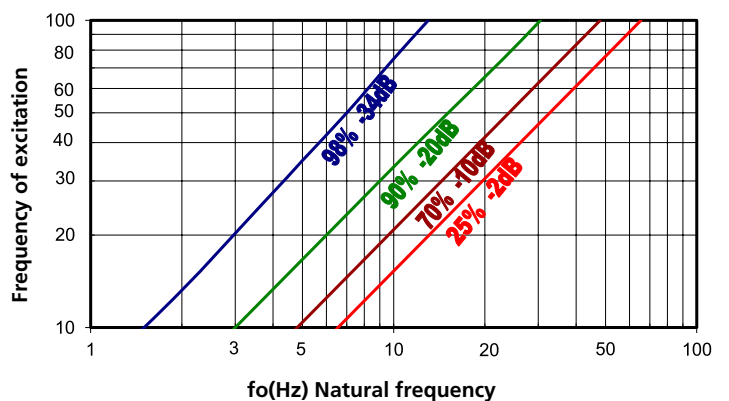

AKUSTIK+ AMC Mecanocaucho

CEILING MOUNTS

Spring Rubber® ceiling hanger

| | REF. AMC | MAX. PERMANENT LOAD | DIMENSIONS | | | | | CODE |
|---|----------|---------------------|------------|-----|----|----|----|-------|
| | | | A | H | B | C | E | |
|  | SRB-25 | 25 Kg | 75 | 150 | 30 | 12 | 50 | 23401 |
| | SRB-50 | 50 Kg | 75 | 150 | 30 | 12 | 50 | 23402 |
| | SRB-75 | 75 Kg | 75 | 150 | 30 | 12 | 50 | 23403 |
| | SRB-100 | 100 Kg | 75 | 150 | 30 | 12 | 50 | 23404 |
| | SRB-125 | 125 Kg | 75 | 150 | 30 | 12 | 50 | 23405 |

